

# LEGIBILITY NOTICE

A major purpose of the Technical Information Center is to provide the broadest dissemination possible of information contained in DOE's Research and Development Reports to business, industry, the academic community, and federal, state and local governments.

Although a small portion of this report is not reproducible, it is being made available to expedite the availability of information on the research discussed herein.

---

Los Alamos National Laboratory is operated by the University of California for the United States Department of Energy under contract W-7405-ENG-36

---

**TITLE: THE NEW CHOPPER SPECTROMETER AT LANSCE, PHAROS**

**AUTHOR(S): R. A. Robinson, M. Nutter, and R. N. Silver, LANSCE; D. T. Hooten  
and R. L. Ricketts, MEE Division**

**SUBMITTED TO: Proceedings of ICANS-X, October 3-7, 1988, Los Alamos, NM**

### **DISCLAIMER**

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

By acceptance of this article, the publisher recognizes that the U.S. Government retains a nonexclusive, royalty free license to publish or reproduce the published form of this contribution, or to allow others to do so, for U.S. Government purposes.

---

The Los Alamos National Laboratory requests the publisher identify this article as work performed under the auspices of the U.S. Department of Energy.

---

Los Alamos

Los Alamos National Laboratory  
Los Alamos, New Mexico 87545

**MASTER**

FORM NO. 846-R4  
SI NO. 76,79

REPRODUCTION OF THIS DOCUMENT IS UNLIMITED

## THE NEW CHOPPER SPECTROMETER AT LANSCE, PHAROS

R. A. Robinson, M. Nutter and K. N. Silver

Los Alamos Neutron Scattering Center, Los Alamos National Laboratory,  
Los Alamos, NM 87545, USA

D. T. Hooten and R. L. Ricketts

MEE Division, Los Alamos National Laboratory,  
Los Alamos, NM 87545, USA

We describe the new chopper spectrometer PHAROS under design at Los Alamos. It is intended to provide 0.5% incident energy resolution for incident energies between 50 meV and 2 eV. This will be achieved with a methane moderator and a 20m incident flight path on Flight Path 16 of the Los Alamos Neutron Scattering Center. The secondary flight path will be 4m for scattering angles between  $10^\circ$  and  $140^\circ$ . For small scattering angles (down to  $0.5^\circ$ ), the secondary flight path can be extended to 10m. We include results of preliminary tests on phasing a prototype chopper and the Proton Storage Ring. These show that phasing can be achieved and that the width of the transmitted neutron pulse is in reasonable agreement with calculation.

### 1. Description of the Proposed Spectrometer

A new chopper spectrometer is currently under design at the Los Alamos Neutron Scattering Center. In March 1987, a workshop was held at Argonne National Laboratory to define the parameters of the spectrometer, and the present design does not differ greatly from the thinking expressed in the report[1] of that workshop. The configuration of the spectrometer is shown schematically in Fig.1 and the proposed instrument parameters are given in Table 1. A more detailed scale drawing showing chopper positions and building constraints is shown in Fig. 2.

The spectrometer will be installed on Flight Path 16 which currently views a water moderator (in the flux-trap geometry) at  $15^\circ$  from the normal to its surface. This will be replaced by a liquid methane moderator by 1992. Up to three choppers will be placed in the incident beam. The most important of these is the primary chopper, which is closest to the sample position. It is an aluminium-bodied chopper, mounted on a magnetic bearing system which has been described previously[2], with a borated slit package. Secondly, there will be a T-zero suppressor which is intended to block the beam line when protons hit the target, but be completely removed from the beam by the time 2eV neutrons (the highest energy we currently envisage using) reach it. While it would be best, from a background point of view, to place the T-zero suppressor as close to the source as possible, it will be 10m from the source, in order to have the beam fully open in time for 2eV neutrons. Thirdly, there will be provision for yet another chopper to be placed, at some later date, close to the bulk shield. This will be a fast chopper, similar to the primary chopper and its purpose will be to clean up the spectrometer resolution function and/or to improve the time resolution beyond that of the moderation time. As the beam size in this position is larger than at the sample position, it would be best if this chopper could contain an aperture significantly larger than the sample size.

Our philosophy is very similar to that which has been employed at ISIS, namely that we will have a fast magnetic-bearing chopper for monochromation purposes, with a slower nickel-alloy T-zero suppressing device upstream to reduce backgrounds. In contrast, the practice to date at IPNS has been to employ one Be-bodied chopper, on mechanical bearings, for both purposes.

The secondary flight path will be evacuated, with the detectors placed outside the vacuum, behind thin aluminium alloy windows. It will extend to 4m for scattering angles between  $10^\circ$  and  $140^\circ$  and can be extended to a maximum of 10m in the forward direction. The purpose of this is for experiments at small momentum transfers (and thence small scattering

angles) like neutron Brillouin scattering[3,4]. We plan to reach scattering angles as low as  $0.5^\circ$  although we will need additional collimation between sample and chopper to achieve this cleanly. In all probability, the low-angle option will ready before the wide-angle flight path, and we plan to build it in such a way that the spectrometer can be used solely in that mode at first.

The spectrometer will use 10 atmosphere  $^3\text{He}$  proportional counters throughout, most probably 2.5cm diameter 90 cm active-length linear position-sensitive detectors. We are currently working on window designs, for the vacuum vessel, which are compatible with this detector configuration, while minimising the dead angle due to structural window panes.

The incident beam profile and chopper apertures are such that samples of size up to 5cm x 7.5cm may be used. This is significantly larger than beam sizes at ISIS, but significantly smaller than those on LRMECS and HRMECS at IPNS.

## 2. Preliminary Tests of the Chopper System

Fig. 3 shows the components of our rotor immediately prior to assembly. We have run the primary chopper at 8m from the moderator, on a test beam line, Flight Path 5, at LANSCE. This flight path is considerably shorter than that proposed for the final spectrometer and it views a low-resolution ambient water moderator. The results are shown in Fig. 4. Fig 4(a) shows the relative phasing of the LAMPF accelerator to our chopper, without phasing the Proton Storage Ring (PSR)[5] to the chopper. This distribution is very broad, with the tails clearly extending to  $\pm 150 \mu\text{s}$ . We believe that this is mainly due to inaccuracies introduced in the zero-crossing circuitry that triggers LAMPF. However, the proton beam can be held in the PSR for up to  $150 \mu\text{s}$ , with extraction on a trigger from the chopper. Results in this mode are shown in Figs. 4(b) through (d). Fig. 4(b) shows the signal from a magnetic pick up on the rotor and these data are directly comparable with Fig. 4(a). There is a small tail on the distribution, which we believe is

due to the 150  $\mu$ s window being insufficient in some cases. Figs. 4(c) and (d) show transmitted neutron signals in two downstream monitors, the first of which is immediately after the chopper and the second of which is a further 3.1m downstream. The peak in Figure 4(c) has a standard deviation of 3.60 $\mu$ s, and if one calculates the width one should observe, based on the chopper parameters, the result in Fig. 4(b) and the monitor thickness, one arrives at a standard deviation of 3.2 $\mu$ s. Given the imprecision of the measurement in Fig. 4(b), this is reasonable agreement. The width of the peak in the downstream monitor is dominated by dispersion of the neutron pulse, which is mainly due to the moderator pulse width.

These results show definitively that we can phase the chopper and the PSR.

#### Acknowledgements

We are glad to acknowledge a number of fruitful discussions with Drs. J. M. Carpenter, A. D. Taylor and R. Pynn. This work was supported, in part, by the division of Basic Energy Sciences of the U.S. Department of Energy.

#### References

- [1] J. M. Carpenter, K. Crawford, R. Kleb, C. -K. Loong, G. Ostrowski, D. L. Price, M. Nutter, R. Pynn, R. A. Robinson, R. N. Silver, J. M. Rowe, P. Sokol and A. D. Taylor, Los Alamos Report LA-UR-87-2582 (1987).
- [2] M. Nutter, L. Lewis, S. Tepper, R. N. Silver and R. H. Heffner, in Proceedings of VIIIth meeting of ICANS, Oxford 8-12th July 1985, Rutherford Appleton Laboratory Report RAL-85-110 Vol.III, p.697.
- [3] R. A. Robinson, in Proceedings of International Conference on Neutron Scattering, Grenoble, France, 12-15th July 1988, to be published in Physica B. Los Alamos preprint LA-UR-88-1573 (1988).

- [4] R. A. Robinson, in these proceedings, Los Alamos preprint LA-UR-88-3099 (1988).
- [5] G. P. Lawrence, R. Cooper, D. W. Hudgings, G. Spalek, A. J. Jason, E. F. Higgins and R. E. Gillis, *Experientia Supplementum* 40 (1980) 103 (proc. 11th Int. Conf. on High Energy Acceleration, Geneva (1980) p.103).

### Figure Captions

- Fig. 1 A schematic diagram of the proposed LANSCE chopper spectrometer
- Fig. 2 A scale drawing showing the position of the choppers and the spectrometer footprint in the LANSCE facility. The primary chopper sample and secondary flight path will all be in the new Experimental Hall ER-2, while the T-zero chopper and a possible pulse-shaping chopper will be in the old experimental hall ER-1.
- Fig. 3 Components of the 600 Hz rotor prior to assembly. The slit package consists of 0.71mm thick boron-fibre epoxy resin slats with 0.76mm open slits between, all on a 1.5m radius.
- Fig. 4 Time-of-flight spectra for the chopper system on flight path 5 at LANSCE.
  - (a) the magnetic pick up signal on the rotor, with the chopper following the LAMPF accelerator trigger signal. This represents the time jitter in the accelerator trigger signal. The FWHM is approximately 42  $\mu$ s, but with very substantial tails to the distribution.
  - (b) magnetic pick-up signal as in (a), but with the proton beam held in the PSK until kicked out on a trigger from the chopper control signal. The standard deviation of this distribution is

approximately  $1.9\ \mu\text{s}$ , the time bin-width ( $3.2\mu\text{s}$ ) being insufficient to determine this quantity accurately.

(c) signal in a beam monitor immediately after the chopper, with extraction from the PSR triggered by the chopper. The standard deviation of this distribution is  $3.60\pm0.12\ \mu\text{s}$ .

(d) signal in a downstream monitor, with extraction from the PSR triggered by the chopper. The standard deviation of this distribution is  $5.50\pm0.22\ \mu\text{s}$ .

TABLE 1

Moderator-Chopper Distance	18.5m
Chopper-Sample Distance	1.5m
Sample-Detector Distance	4m between $10^\circ$ and $140^\circ$ up to 10m between $-10^\circ$ and $+10^\circ$
Moderator	$12.5\times12.5\text{cm}^2$ liquid methane
Source Repetition Frequency	12 or 24 Hz
Chopper Frequency	600 Hz
Chopper Diameter	10cm
Chopper Slit Spacing	1mm or more
Sample Size	up to $5\text{cm} \times 7.5\text{cm}$



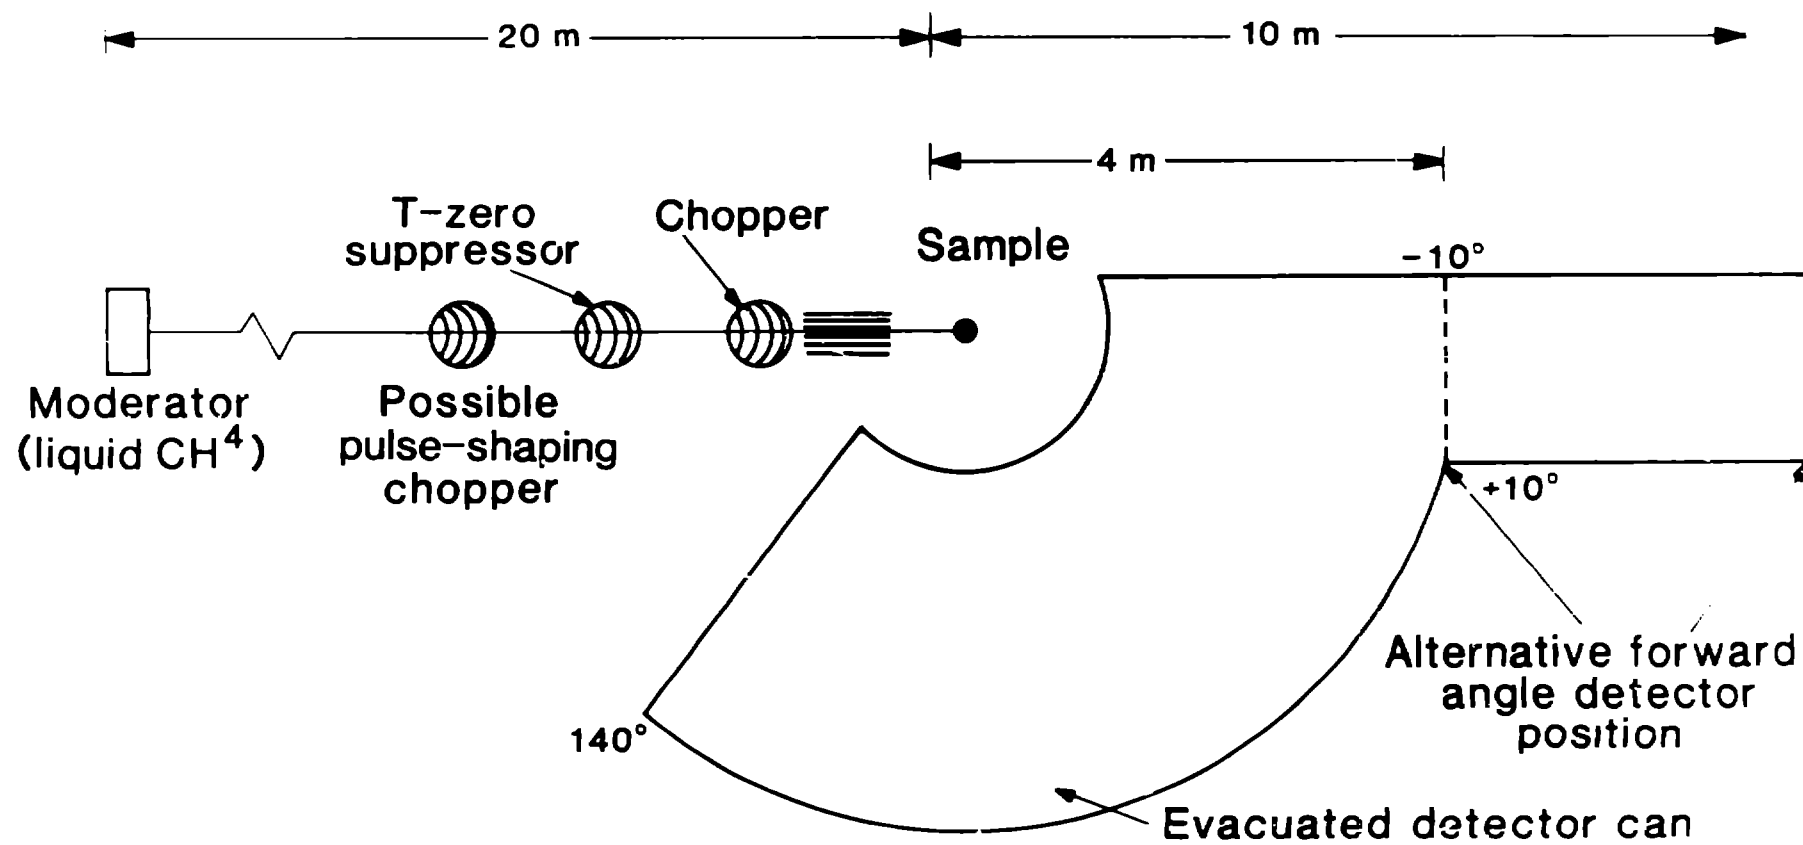


Fig. 1



